

ARN 4004


ASSEMBLY & INSTALLATION GUIDE

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING * SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

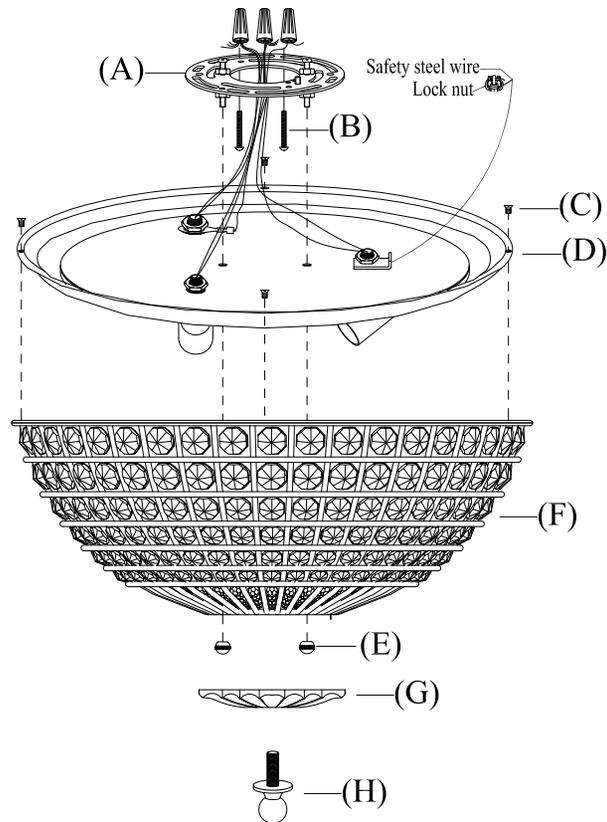

1. Remove mounting plate (A) from fixture base (D) by unscrewing cap nuts (E).
2. Affix mounting plate (A) onto ceiling outlet box and secure with mounting screws (B).
3. Attach fixture's steel safety cable to structural member in the wall. (As shown in illustration A)
4. Loosen base screws (C), attach shade (F) to fixture base (D) and tighten with base screws (C).
5. Attach ground (green) wire to ground wire from ceiling outlet box (usually green or copper in color), fasten together with a plastic wire connector. Tightly wrap the wire connector with electrical tape so the end of the connector is sealed. IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.
6. Connect neutral (white) fixture wire coming from fixture base to neutral (usually white) outlet wire. Fasten both wires together with a plastic wire connector and tightly wrap the wire connector with electrical tape.
7. Repeat the procedure with the hot (black) wires. Always make sure that no wire strands are left outside the
8. connectors. DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OTHERWISE SAFETY WILL BE COMPROMISED. Attach fixture base (D) with shade (F) to mounting plate (B) and tighten with cap nuts (E).
9. Insert light bulbs into lamp holders. Place end cover (G) to shade (F) and secure with finial (H).