



ASSEMBLY INSTRUCTIONS

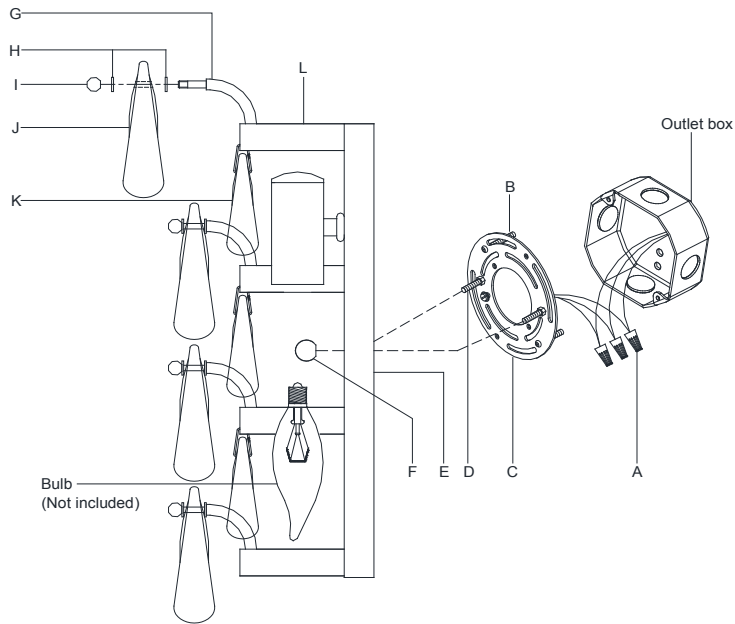

Liscia 12" Sconce

Item # ARN 2170

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING*SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT. DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

NOTE: CAREFULLY UNPACK EACH PIECE IN TOP LAYER OF PACKING PRIOR TO REMOVING. RETAIN ALL PACKING MATERIAL UNTIL INSPECTION AND INSTALLATION ARE FINAL.

- Carefully remove all parts from the box.
- Remove the mounting plate (C) from the backplate (E) by loosening the ball nuts (F).
- Affix mounting plate (C) onto the outlet box and secure with mounting screws (B).
- Connect ground wire from the fixture (bare copper) to ground wire from the outlet box (usually green or copper in color) using wire nut (A).

IT IS IMPERATIVE THAT THIS FIXTURE BE GROUNDED.
- Connect the neutral wire (WHITE) from the fixture to the neutral wire (White) from the outlet box using wire nut (A).
- Connect the hot wire (BLACK) from the fixture to the hot wire (Black) from the outlet box using wire nut (A).

DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.

- Attach the backplate (E) onto the mounting plate (C), let screws (D) pass through the holes on the backplate (E), then secure with ball nuts (F).
- Insert bulb (not included) into the socket.
- Hang the crystal (K) onto the metal ring (L).
- Loosen the ball nuts (I) and remove one of the rubber washer (H).
- Attach the rubber washer (H) and crystal (J) to the rod (G), then secure with rubber washer (H) and ball nuts (I).
- Installation is complete, turn on power at fuse or circuit breaker.

***Clean with a dry, soft cloth only. Use no harsh abrasives or chemical agents.

